

DECLARATION OF PERFORMANCE

No 1134-CPD-076

Product(s) Identification Code:

Firedex Benelux: FX2201/B, FX2202/B, FX2204/B, FX2208/B
Firedex: FX2201, FX2202, FX2204, FX2208
CF: CF100/CX100, CF200/CX200, CF400/CX400, CF800/CX800
Sicli: First 2Z, First 4Z, First 8Z

Type, Batch or serial number or any other element allowing identification of the construction products(s) as required pursuant to Article 11(4):

FX2201/B, FX2202/B, FX2204/B, FX2208/B, FX2201, FX2202, FX2204, FX2208, CF100/CX100,
CF200/CX200, CF400/CX400, CF800/CX800, First 2Z, First 4Z, First 8Z

Intended use or uses of the construction product, in accordance with the applicable harmonised technical specification, as foreseen by the manufacturer:

Fire detection and fire alarm systems

Name, registered trade name or registered trade mark and contact address of the manufacturer as required pursuant to Article 11(5):

Cooper Lighting and Safety Limited, Wheatley Hall Road, Doncaster, South Yorkshire, DN2 4NB

Where applicable, name and contact address of the authorized representative whose mandate covers the tasks specified in Article 12(2):

Not applicable

System or systems of assessment and verification of constancy of performance of the construction product as set out in Annex V:

System 1

In case of the declaration of performance concerning a construction product covered by the harmonized standard:

ANPI, Parc Scientifique Fleming, Granbonpré 1, B-1348 Louvain-la-Neuve, Belgium.

performed type testing and the initial inspection of the manufacturing plant and of the factory production control with continuous surveillance assessment and approval of the factory production control under system 1 and issued the EC certificates of conformity:

1134-CPD-076

Declared performance:

All requirements including all Essential Characteristics and the corresponding performances for the intended use or uses indicated in point 3 above have been determined as described in the hEN mentioned in the table below.


Essential Characteristics	Performance	Harmonized Technical Specification	
		EN54-2:1997 +A1:2006	EN54-4:1997
Performance Under Fire Conditions	Pass	4, 5, 7	-
Response Delay (Response Time To Fire)	Pass	7.1, 7.7, 7.11, 7.12	-
Performance Of Power Supply	Pass	-	4, 5, 6
Operational Reliability	Pass	4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14	4, 5, 6, 7, 8
Durability Of Operational Reliability, Temperature Resistance	Pass	15.4	9.5
Durability Of Operational Reliability, Vibration Resistance	Pass	15.6, 15.7, 15.15	9.7, 9.8, 9.15
Durability Of Operational Reliability, Electrical Stability	Pass	15.8 to 15.13	9.9 to 9.13
Durability Of Operational Reliability, Humidity Resistance	Pass	15.5, 15.14	9.6, 9.14

The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9.

This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4. Signed for and on behalf of Cooper Lighting & Safety Limited by:

27th June 2013

Date and Place of Signature

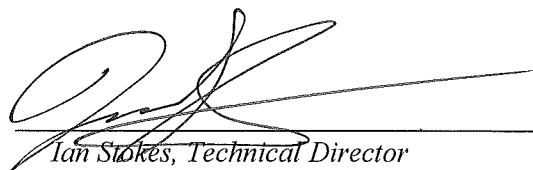

Ian Stokes, Technical Director